

APRIL 2000
P/N: 432-10022

SPECIFICATIONS	
MAXIMUM WORKING PRESSURE	250 PSIG
MAXIMUM TEMPERATURE	225°F
BODY MATERIAL	PLASTIC
FLOAT MATERIAL	PLASTIC
SEALS (O-RING) MATERIAL	BUNA-NITRILE
WEIGHT	1.8 OZ

VAN AIR INSTALLATION INSTRUCTIONS
ADM-2-2
AUTO DRAIN KIT
P/N: 84-10120
(FOR F200 SERIES FILTERS)

PRODUCT PURPOSE & FUNCTION:

Van Air's ADM-2-2 Auto Drain provides automatic draining of effluent without the need for external power of any kind. With a screen mesh protecting the float from dirt, the ADM-2-2 functions without interruption.



©2000 VAN AIR SYSTEMS INC.


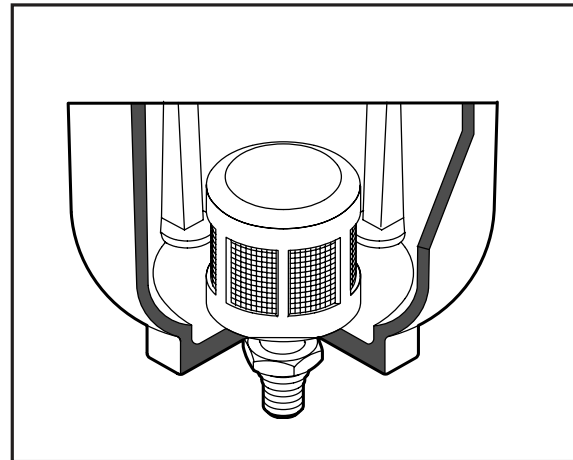


FIGURE 2 ADM-2-2 KIT DETAILS

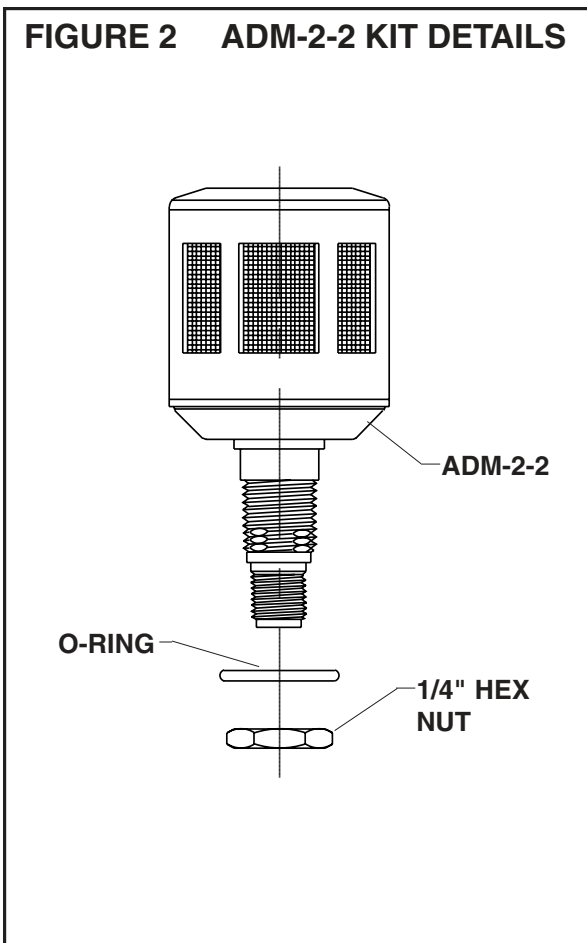

KIT INCLUDES:

QTY	DESCRIPTION
1	ADM-2-2
1	O-RING
1	1/4" HEX NUT

WARNINGS

- DO NOT INSTALL ADM-2-2 TO EQUIPMENT WHILE UNDER PRESSURE.
- FOLLOW INSTRUCTIONS FOR ADM-2-2 WHEN INSTALLING INTO AIR SYSTEM.
- DO NOT OPERATE UNIT ABOVE 250 PSIG.

INSTALLATION (Reference Figure 1)

1. Place o-ring onto ADM-2-2.
 2. Thread the ADM-2-2 into the drain hole of the filter bowl and tighten firmly by
 3. hand.
- Thread the 1/4" hex nut onto the outlet of the ADM-2-2 and tighten down with a 7/16" wrench on the thread flats and 5/8" wrench on the hex nut.

FIGURE 1 INSTALLATION DETAILS

